


Li/MnO₂ Primary System



Dimensions
in mm
(inches)

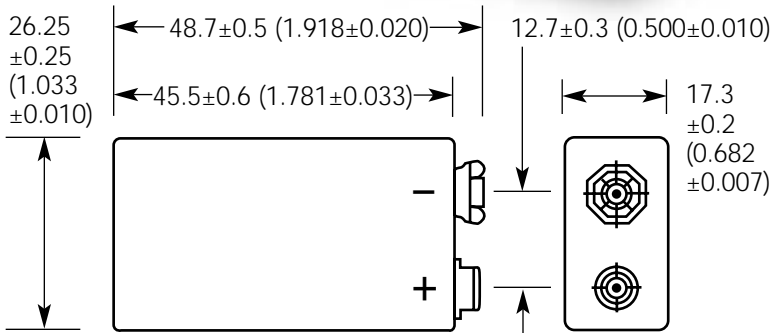

U9VL-J 9V Size Battery For Long-Life Applications

System:	Lithium/Manganese Dioxide
Designation:	NEDA 1604 LC
Nominal Voltage:	9.0 Volts
Capacity (C):	1,200 mAh @ 900 Ω to 5.4V
Max. Discharge:	120 mA Continuous
Weight:	36.4 grams
Temp. Range:	-40° to 60°C (-40° to 140°F)
Volume:	22.6 cm ³
Terminals:	Miniature Snap
Housing:	Aluminum/Mylar Label
Safety:	Less than 2 grams of lithium; no restrictions on transport; MSDS available separately



Recognized under the Component Program
of Underwriters Laboratories, Inc.

